



Flat ejector pin hardened
Expulsor laminar templado
Wypychacz płaski hartowany
Extrator de lamina temperado
Ejecteur lame trempé type

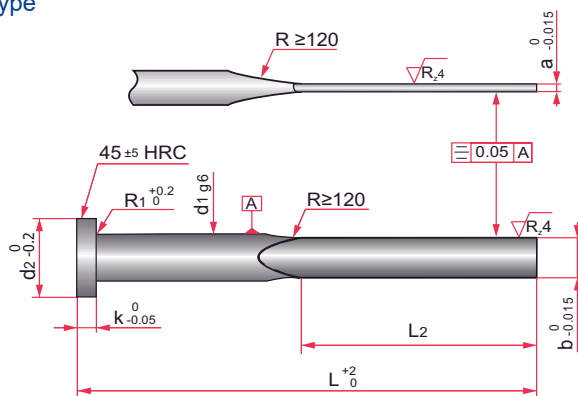


Mat.: 1.2210 / 58±2 HRC. DIN 1530A . Maximum temperature at work: 220° C


R1	k	d2	d1	L2	a	b	L	REF.
0,3	3	8	4	40	0,8	3,5	80	AL-0,8x3,5x080
				50			100	AL-0,8x3,5x100
				60			125	AL-0,8x3,5x125
				80			160	AL-0,8x3,5x160
				40	1		80	AL-1,0x3,5x080
				50			100	AL-1,0x3,5x100
				60			125	AL-1,0x3,5x125
				80			160	AL-1,0x3,5x160
				40	1,2		80	AL-1,2x3,5x080
				50			100	AL-1,2x3,5x100
				60			125	AL-1,2x3,5x125
				80			160	AL-1,2x3,5x160
			4,2	40	0,8	3,8	80	AL-0,8x3,8x080
				50			100	AL-0,8x3,8x100
				60			125	AL-0,8x3,8x125
				80			160	AL-0,8x3,8x160
				100			200	AL-0,8x3,8x200
				40	1		80	AL-1,0x3,8x080
				50			100	AL-1,0x3,8x100
				60			125	AL-1,0x3,8x125
				80			160	AL-1,0x3,8x160
				100			200	AL-1,0x3,8x200
				40	1,2		80	AL-1,2x3,8x080

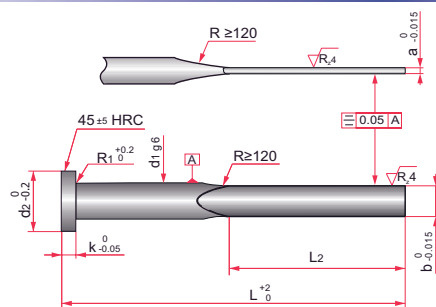

R1	k	d2	d1	L2	a	b	L	REF.					
0,3	3	8	4,2	50	1,2	3,8	100	AL-1,2x3,8x100					
				60			125	AL-1,2x3,8x125					
				80			160	AL-1,2x3,8x160					
				100			200	AL-1,2x3,8x200					
		10	5	40	1	4,5	80	AL-1,0x4,5x080					
				50			100	AL-1,0x4,5x100					
				60			125	AL-1,0x4,5x125					
				80			160	AL-1,0x4,5x160					
				100			200	AL-1,0x4,5x200					
				125			250	AL-1,0x4,5x250					
				40	1,2		80	AL-1,2x4,5x080					
				50			100	AL-1,2x4,5x100					
				60			125	AL-1,2x4,5x125					
				80			160	AL-1,2x4,5x160					
				100			200	AL-1,2x4,5x200					
				125			250	AL-1,2x4,5x250					
				40	1,5		80	AL-1,5x4,5x080					
				50			100	AL-1,5x4,5x100					
				60			125	AL-1,5x4,5x125					
				80			160	AL-1,5x4,5x160					
				100			200	AL-1,5x4,5x200					
				125			250	AL-1,5x4,5x250					
				0,5	5		12	6	40	1	5,5	80	AL-1,0x5,5x080
									50			100	AL-1,0x5,5x100
60	125	AL-1,0x5,5x125											
80	160	AL-1,0x5,5x160											
100	200	AL-1,0x5,5x200											
125	250	AL-1,0x5,5x250											
40	1,2	80	AL-1,2x5,5x080										
50		100	AL-1,2x5,5x100										

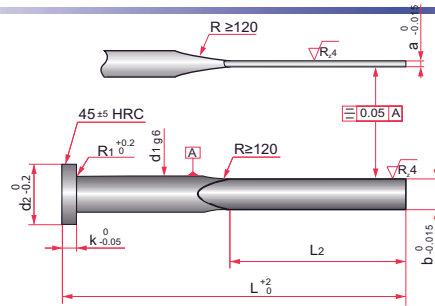

R1	k	d2	d1	L2	a	b	L	REF.				
0,5	5	12	6	60	1,2	5,5	125	AL-1,2x5,5x125				
				80			160	AL-1,2x5,5x160				
				100			200	AL-1,2x5,5x200				
				125			250	AL-1,2x5,5x250				
				40	1,5		80	AL-1,5x5,5x080				
				50			100	AL-1,5x5,5x100				
				60			125	AL-1,5x5,5x125				
				80			160	AL-1,5x5,5x160				
				100	200		AL-1,5x5,5x200					
				125	250		AL-1,5x5,5x250					
				40	2		80	AL-2,0x5,5x080				
				50			100	AL-2,0x5,5x100				
				60			125	AL-2,0x5,5x125				
				80			160	AL-2,0x5,5x160				
				100			200	AL-2,0x5,5x200				
				125			250	AL-2,0x5,5x250				
				14			8	40	1,2	7,5	80	AL-1,2x7,5x080
				50				100			AL-1,2x7,5x100	
				60	125			AL-1,2x7,5x125				
				80	160			AL-1,2x7,5x160				
		100	200	AL-1,2x7,5x200								
		125	250	AL-1,2x7,5x250								
		40	1,5	80	AL-1,5x7,5x080							
		50		100	AL-1,5x7,5x100							
		60		125	AL-1,5x7,5x125							
		80		160	AL-1,5x7,5x160							
		100		200	AL-1,5x7,5x200							
		125		250	AL-1,5x7,5x250							
		40	2	80	AL-2,0x7,5x080							
		50		100	AL-2,0x7,5x100							

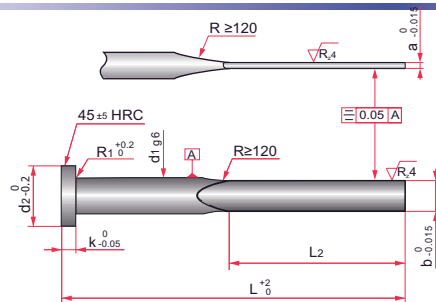

R1	k	d2	d1	L2	a	b	L	REF.			
0,5	5	14	8	60	2	7,5	125	AL-2,0x7,5x125			
				80			160	AL-2,0x7,5x160			
				100			200	AL-2,0x7,5x200			
				125			250	AL-2,0x7,5x250			
		16	10	50	1,5	9,5	100	AL-1,5x9,5x100			
				60			125	AL-1,5x9,5x125			
				80			160	AL-1,5x9,5x160			
				100			200	AL-1,5x9,5x200			
				125			250	AL-1,5x9,5x250			
				50	2		100	AL-2,0x9,5x100			
				60			125	AL-2,0x9,5x125			
				80			160	AL-2,0x9,5x160			
				100			200	AL-2,0x9,5x200			
				125			250	AL-2,0x9,5x250			
				0,8	7	18	12	60	11,5	125	AL-2,0x11,5x125
								80		160	AL-2,0x11,5x160
								100		200	AL-2,0x11,5x200
								125		250	AL-2,0x11,5x250
60	2,5	125	AL-2,5x11,5x125								
80		160	AL-2,5x11,5x160								
100		200	AL-2,5x11,5x200								
125		250	AL-2,5x11,5x250								
22	16	80	2					15,5		160	AL-2,0x15,5x160
		100								200	AL-2,0x15,5x200
		125		250	AL-2,0x15,5x250						
		80	2,5	160	AL-2,5x15,5x160						
		100		200	AL-2,5x15,5x200						
		125		250	AL-2,5x15,5x250						