




Tunnel gate insert
 Inserto de inyección
 Wkładka tunelowa
 Postiço de injeção
 Embout d'injection cylindrique

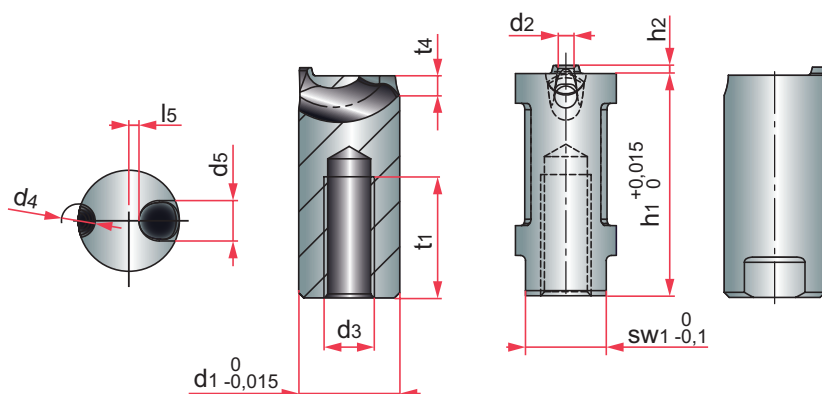

Hardness: 54 ± 2 HRC.


SW1	t1	t4	l5	h2	d3	d4	d5	d1	h1	d2	REF.
5,5	10	1,25	0,5	0,6	M4	2,2	2,5	6	17	0,6	BR1050/06x17x0,6
6	13	1,5	0,75				3	8	22		BR1050/08x22x0,6
						2,4				0,8	BR1050/08x22x0,8
											BR1050/10x22x0,8
8	12	2	1	0,8	M5	2,5	4	10			
						2,9					
						3,3				1,6	BR1050/10x22x1,6
10	11	2,5				2,9	5	12		1,2	BR1050/12x22x1,2
						3,3			1,6	BR1050/12x22x1,6	
						3,7			2,0	BR1050/12x22x2,0	

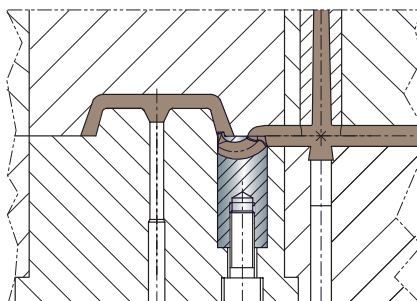

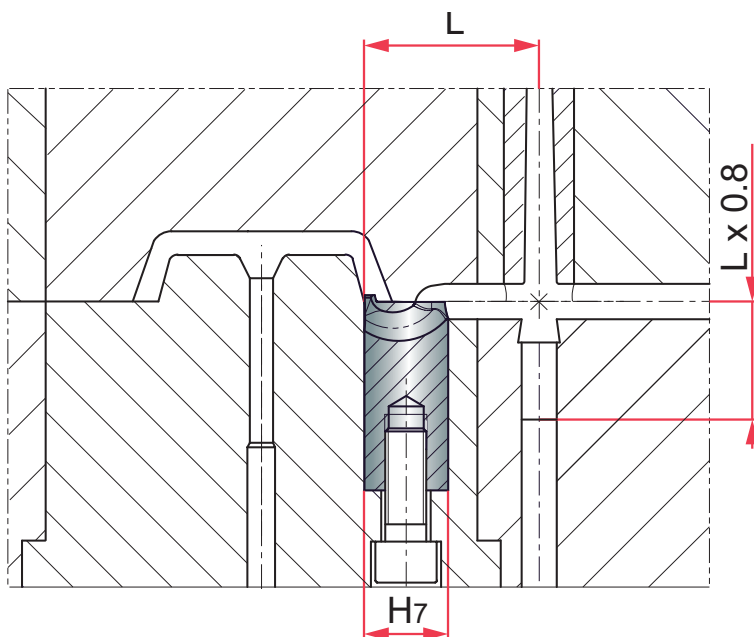


Distance L (mm)				REF.	
TPE, TPU, TPA	PE, PP, PET, PBT	ABS, PA, POM, ABS/PC	PA+GF, PC, SAN, PMMA, PS	BR1050/ ...	BR1060/ ...
9 - 11	12 - 18	15 - 22	18 - 25	... 6 x ...	-
11 - 14	15 - 22	19 - 27	23 - 30	... 8 x ...	... 8 x ...
15 - 18	19 - 27	24 - 33	30 - 38	... 10 x ...	... 10 x ...
18 - 21	22 - 30	27 - 36	32 - 41	... 12 x ...	... 12 x ...

Gate diameter recommendation Diámetro recomendado

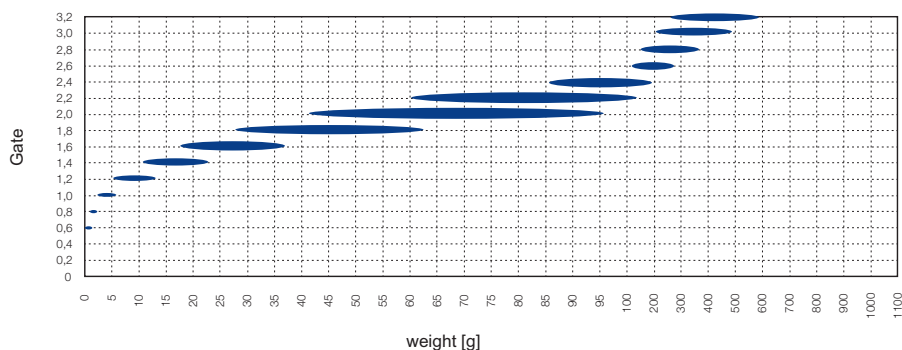

Medium Viscosity

ABS, SAN, POM-CO, PMMA, EPDM, PA, PBT, PET

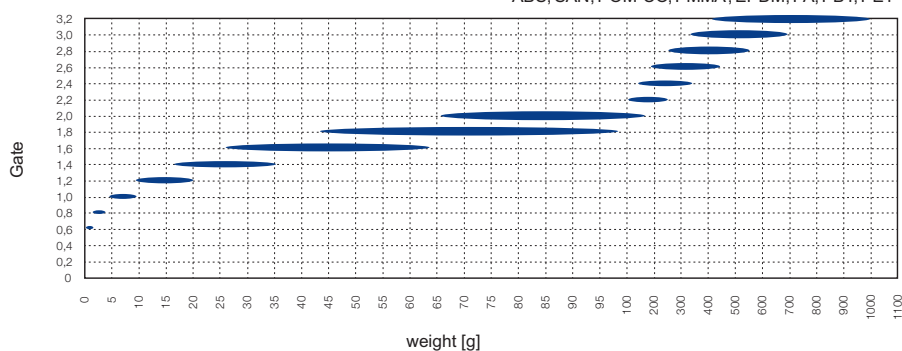

Low Viscosity

PP, PE, PS, SB

